



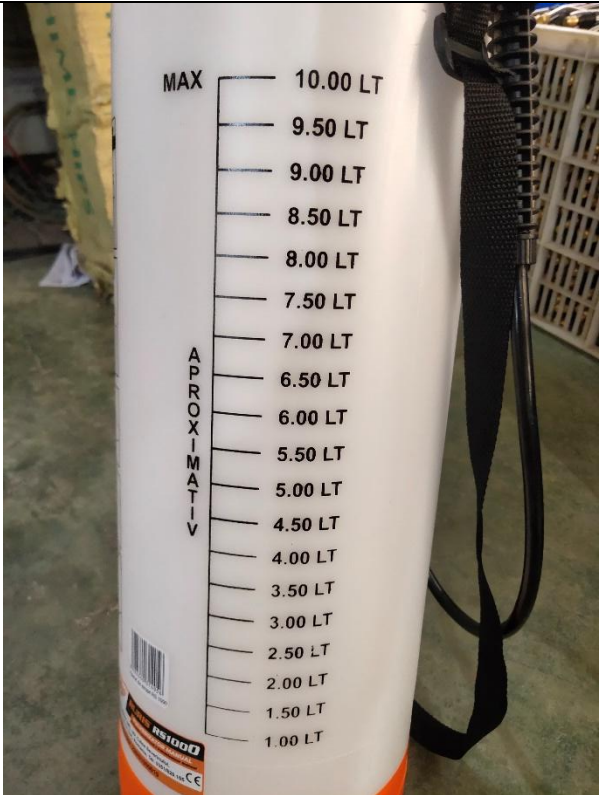


	Ruris Model	RS1000S
1	Tank cap	Orange Pantone 021C
2	Tank	White Pantone Process White
3	P-02 lance	White zinc – Stainless steel
4	Trigger lever	Orange Pantone 021C
5	Rubber hose nut	Orange Pantone 021C
6	Vent valve	Orange Pantone 021C
7	Tank bottom part	Orange Pantone 021C
8	Hose	Black Pantone Process Black C
9	Pump handle part	White Pantone Process White
10	Pump handle	Orange Pantone 021C

No.	Part	Requirement	Picture	Check
1		Pack the unit so that the hose is no longer stretched or tense.		
2		Use a type of rubber that does not contract or dilate in case of temperature changes. When used in operation, there should be no leakage on the joint		

<p>3</p>	<p>Rubber pipe with Pantone Process Black hose and Orange Pantone 021C head</p>			
<p>4</p>	<p>P-02 lance</p>			
<p>5</p>	<p>Make sure that the label with the liter respects the amount of liquid inside.</p>			

6	Print	Better quality print, resistant to moisture and rubbing.		
---	-------	--	--	--